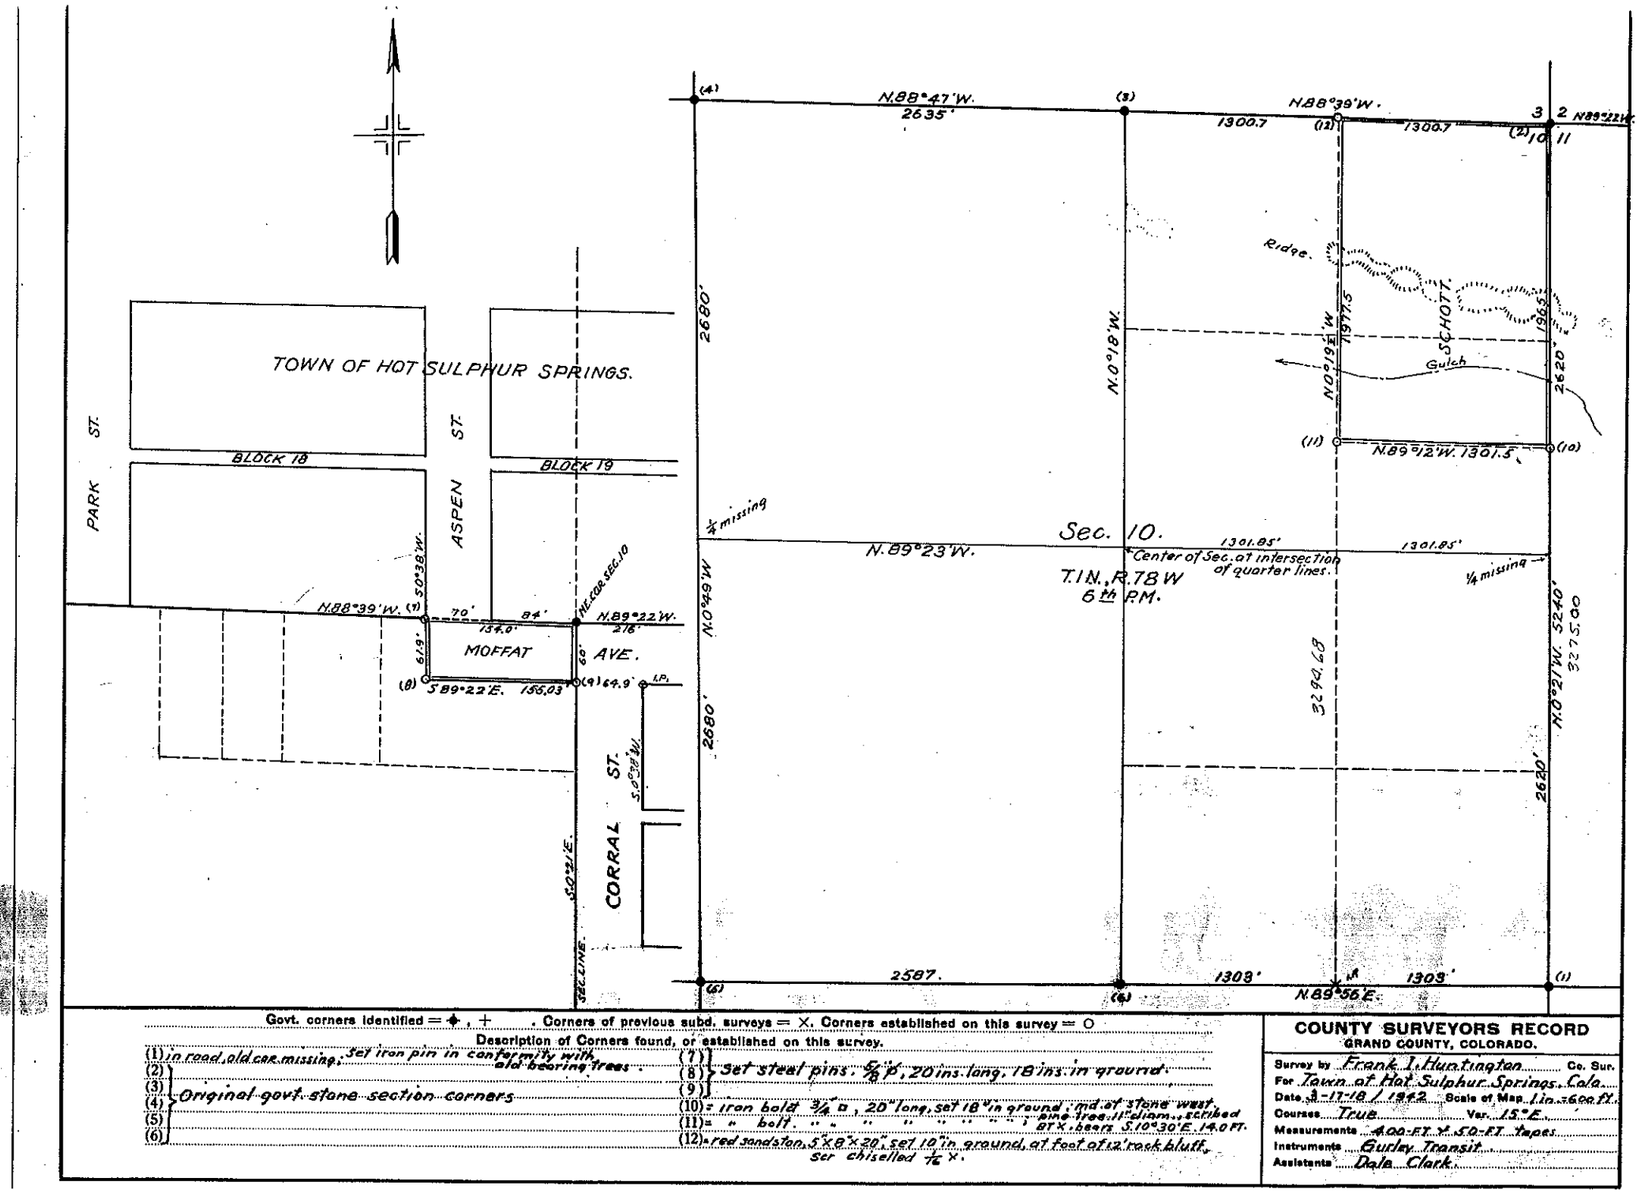

Govt. corners identified = ✦, +. Corners of previous subd. surveys = ×. Corners established on this survey = O

Description of Corners found, or established on this survey.

(1) in road, old car missing, set iron pin in conformity with old bearing trees.
(2)
(3)
(4) Original govt. stone section corners
(5)
(6)
(7)
(8) Set steel pins: ⅝"ø, 20 ins. long, 18 ins. in ground.
(9)
(10) = iron bolt ¾"ø, 20" long, set 18" in ground; nd. at stone west, pine tree, 11" diam., scribed BTX, bears S.10°30'E. 14.0 FT.
(11) = " bolt " " " " " " " " "
(12) = red sandstone, 5"x8"x20", set 10" in ground, at foot of 12' rock bluff, scr chiselled ⅞ X.

COUNTY SURVEYORS RECORD
GRAND COUNTY, COLORADO.

Survey by Frank I. Huntington Co. Sur.
For Town of Hot Sulphur Springs, Colo.
Date 3-17-18 / 1942 Scale of Map 1 in. = 600 ft.
Courses True Var. 15° E.
Measurements 400-FT. & 50-FT. tapes
Instruments Gurley Transit
Assistants Dale Clark